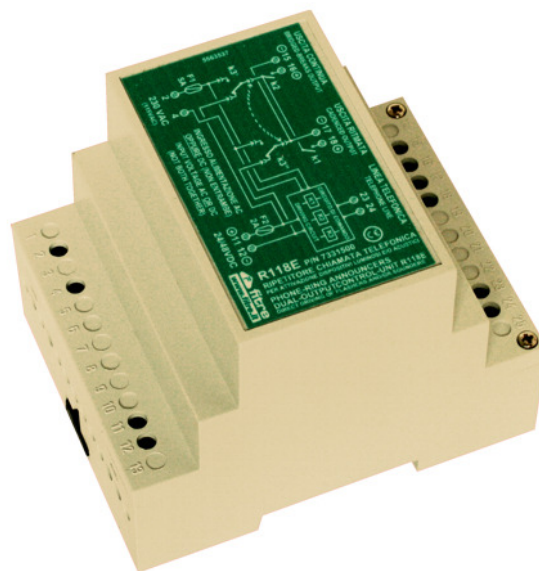
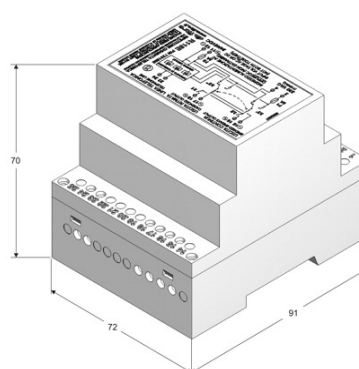


Telephone call repeater relays • indoor or weather & explosion proof
P/N 7331500

Multi-voltage electronic telephone ringer's relay

- Suitable for loads at 115-230VAC (max. 5A) or 24÷48VDC (max. 1A)
- Indoor version for mounting on DIN rail
- 2 output contacts: one repeats the ringing signal cadence, the other one bridges the call breaks


DIN RAIL MOUNTING


dimensions (W x H x D) 91,0 x 72,0 x 71,0 mm
weight 220 g

