


Acoustical and luminous signalling devices • weather & explosion proof
P/N 7329116


Weatherproof robust optical signalling device for indoor and outdoor applications.

- Housing: seawater-resistant aluminium, weatherproof varnish
- Ingress Protection: IP65 (according to IEC 60529)
- Protection class: I
- Flash energy: 15J
- Red powerful electronic flash tube
- Compensation valve to prevent condensation water
- Power supply: 230VAC - 50Hz
- Cable gland: 1x M20 for cable with 8-12mm diameter
- Connection terminals: 2,5mm² single wire / 1,5mm² fine wire

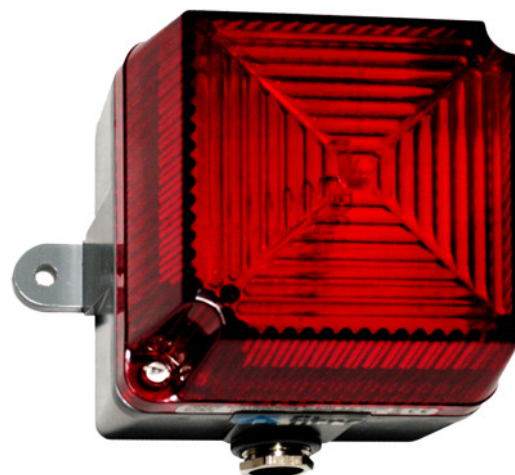

**LUMINOUS
WALL MOUNTING
IP65**

- 30°C to + 50°C

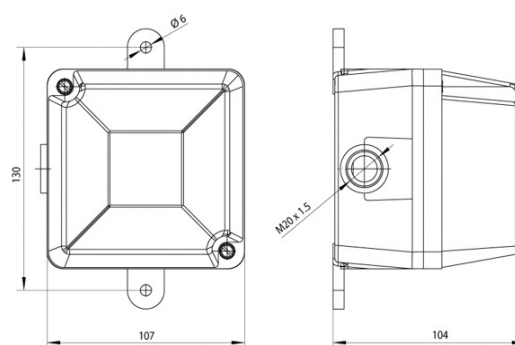

**dimensions (W x H x D) 107,0 x 140,0 x 104,0 mm
weight 700 g**

