

**Non-amplified weatherproof loudspeakers**
**P/N 7327267**



15W weatherproof loudspeaker

- Material / Colour: ASA (Acrylonitrile Styrene Acrylate) / RAL7035
- 16Ω impedance
- Rated / Max. power: 15W / 20W
- SPL (1W/1m @ 1kHz): 108dB
- SPL (15W rated/1m @ 1kHz): 118dB
- Effective frequency range: 330÷8000Hz
- Dispersion (-6dB) 1kHz / 4kHz: 130° / 35°
- Directivity factor, Q (2kHz): 8,3
- Mounting: bracket
- Termination: internal screw connections


**WALL MOUNTING**
**IP56**

- 50°C to +90°C

Sound pressure levels at different frequencies at 1W/1m sine wave

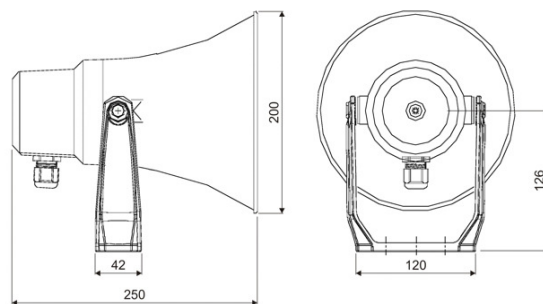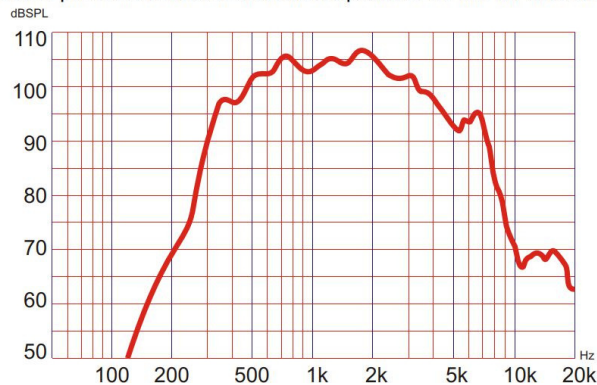

dimensions Ø 200,0 x 250,0 mm

weight 1,7 kg

