

CB (Central Battery) and LB (Local Battery) phones
P/N 7138170

Explosion-proof analog CB telephone

- GRP polyester case
- IP66 protection
- Handset
- No keyboard
- ATEX Certified:
 - Ex II 2 G Ex eb mb [ib] IIC T5 Gb
 - II 2 D Ex tb [ib] IIIC T 100°C Db
 - 25°C < Ta < + 60°C
 - Ex II 2 G Ex eb mb [ib] IIC T6 Gb
 - II 2 D Ex tb [ib] IIIC T 80°C Db
 - 25°C < Ta < + 40°




HANDSET

WALL MOUNTING

IP66

ATEX

- 25°C to + 60°C T5
- 25°C to + 40°C T6

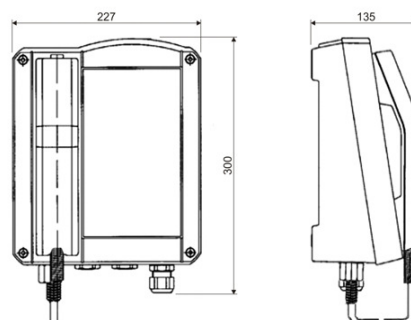

dimensions (W x H x D) 227,0 x 293,0 x 135,0 mm
weight 6,0 kg

