


CB (Central Battery) and LB (Local Battery) phones
P/N 7138170

Explosion-proof analog CB (Central Battery) telephone

- GRP case
- IP66 protection
- Handset
- No display
- No keyboard
- INOX armored handset cable
- Black colour
- ATEX certification:
 - Ex II 2G Ex eb mb [ib] IIC T5 Gb
 - II 2D Ex tb [ib] IIIC T100°C Db
(-25°C < Ta < +60°C)
 - Ex II 2G Ex eb mb [ib] IIC T6 Gb
 - II 2D Ex tb [ib] IIIC T80°C Db
(-25°C < Ta < +40°C)


HANDSET
WALL MOUNTING
IP66
ATEX

- 25°C to + 60°C T5
- 25°C to + 40°C T6

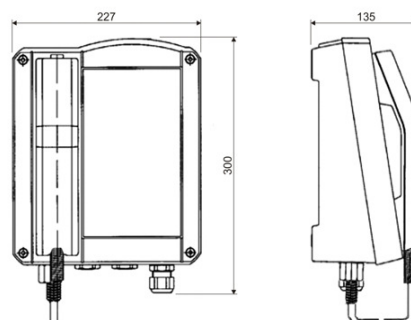

dimensions (W x H x D) 227,0 x 293,0 x 135,0 mm
weight 6,0 kg

