FITRE S.p.A. • DSI Division

Head Office and Production Plant: 20142 Milano • Italy • via Valsolda, 15 phone: +39 02 8959 01 • fax: +39 02 8959 0400 e-mail: divisione.dsi@fitre.it

RELAYS CARD

20240130/12:35

Vandal-proof, weatherproof and explosion-proof handsfree full-duplex phones (analog & VoIP)

1943

P/N 7133676

riportati in questa pubblicazione non sono impegnativi e possono venire modificati senza preavviso. The information contained in this publication are not binding and are subject to change without notice

dati


Card equipped with 2 relays (to switch door lock, lights, etc.) for remote or local control through programmable codes, suitable for 900 series telephones.

Contact range on resistive load:

- maximum switchable power: 60W (DC) 1250VA (AC)
- maximum switchable voltage: 110VDC 250VAC
- maximum switchable current: 2A (DC) 2A (AC)

The range shall be reduced according to the inductive or capacitive load.

A local 12VDC power source is required.

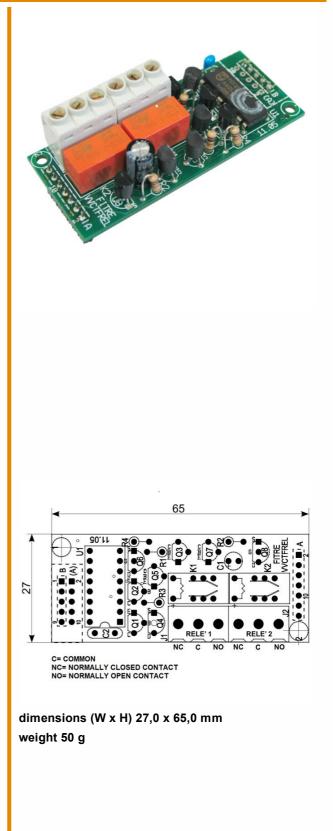

To explore our wide range of products and to verify their conformity with your requirements we invite you to visit our website fitresistemi.com

CommunicationsFirst

www.fitre.it