
## FITRE S.p.A. • DSI Division

**Head Office and Production Plant:** 20142 Milano • Italy • via Valsolda, 15 phone: +39 02 8959 01 • fax: +39 02 8959 0400 e-mail: divisione.dsi@fitre.it

Weatherproof sound-powered telephone

• No outgoing calling system (incoming only)

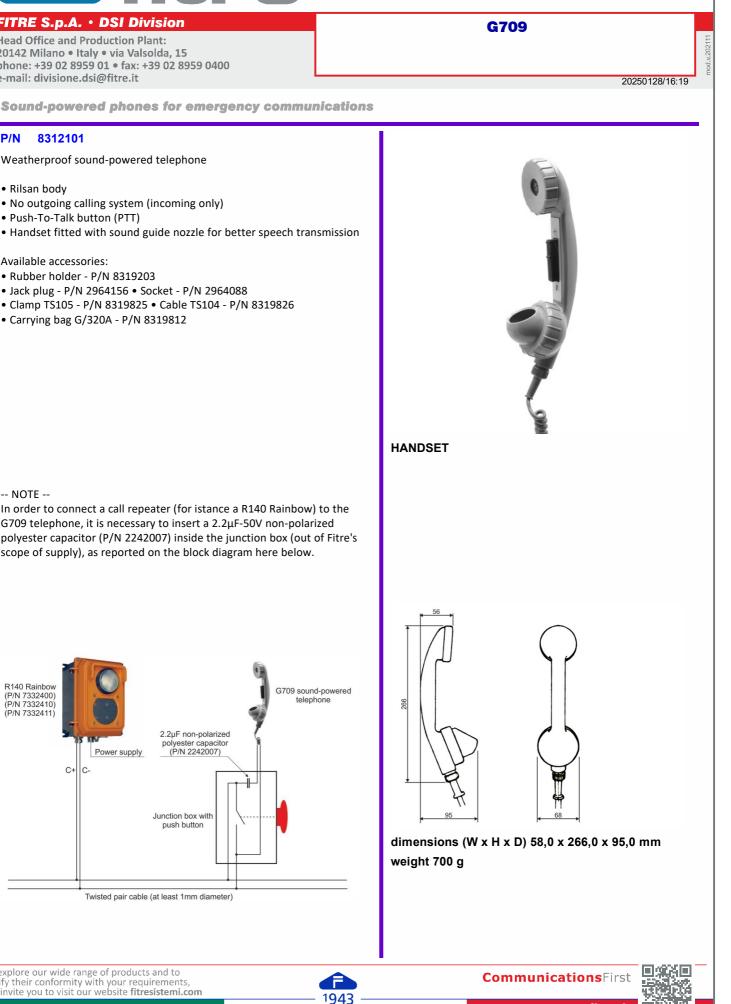

## Available accessories:

Push-To-Talk button (PTT)

8312101

P/N

Rilsan body


- Rubber holder P/N 8319203
- Jack plug P/N 2964156 Socket P/N 2964088
- Clamp TS105 P/N 8319825 Cable TS104 P/N 8319826
- Carrying bag G/320A P/N 8319812



riportati in questa pubblicazione non sono impegnativi e possono venire modificati senza preavviso. The information contained in this publication are not binding and are subject to change without notice

dati

In order to connect a call repeater (for istance a R140 Rainbow) to the G709 telephone, it is necessary to insert a 2.2µF-50V non-polarized polyester capacitor (P/N 2242007) inside the junction box (out of Fitre's scope of supply), as reported on the block diagram here below.

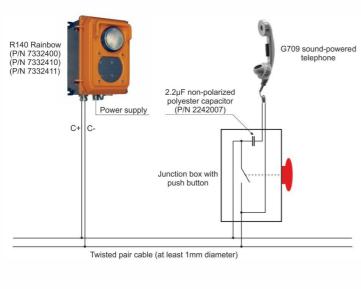

To explore our wide range of products and to verify their conformity with your requirements we invite you to visit our website fitresistemi.com

www.fitre.it