FITRE S.p.A. · DSI Division

Head Office and Production Plant: 20142 Milano • Italy • via Valsolda, 15 phone: +39 02 8959 01 • fax: +39 02 8959 0400

e-mail: divisione.dsi@fitre.it

G2100

20250128/16:11

Sound-powered phones for emergency communications

P/N 8311103

Weatherproof sound-powered telephone

- Polyamide body
- Outgoing calling sound-wheel equipped
- Handset fitted with sound guide nozzle for better speech transmission

Available accessories:

- Jack Plug P/N 2964156 Socket P/N 2964088
- Clamp TS105 P/N 8319825 Cable TS104 P/N 8319826
- Carrying bag G/320A P/N 8319812





HANDSET

-- NOTE --

riportali in questa pubblicazione non sono impegnativi e possono venire modificati senza preavviso. The information contained in this publication are not binding and are subject to change without notice

In order to connect a call repeater (for istance a R140 Rainbow) to the G2100 telephone, it is necessary to insert a $2.2\mu\text{F-50V}$ non-polarized polyester capacitor (P/N 2242007) inside the junction box (out of Fitre's scope of supply), as reported on the block diagram here below.

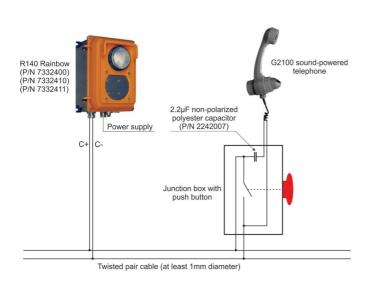



dimensions (W x H x D) 67,0 x 260,0 x 122,0 mm weight 600 g

To explore our wide range of products and to verify their conformity with your requirements, we invite you to visit our website **fitresistemi.com**



CommunicationsFirst

