


**Indoor, weatherproof and explosion-proof phones (analog & VoIP)**
**P/N 7132127**

Analog ACB telephone for indoor and outdoor use with protection door

- IP66 protection with closed door
- Housing in polycarbonate
- PIN for changing settings
- Ringing volume:
  - approx. 90dB(A) at 1m distance with open housing cover
  - approx. 65dB(A) at 1m distance with closed housing cover
- Supply voltage: 24÷66VDC
- Supply current: 19÷100mA
- AC ringing voltage: 30÷90VAC
- Ringing signal frequency: 16÷68Hz
- Mouthpiece with elektret microphone
- Receiver with dynamic capsule
- Connection for secondary sounder
- Protective door in yellow, red or transparent
- Cable glands: 2 x M16 x 1.5 for 5-9mm cable diameters


**HANDSET**
**WALL MOUNTING**
**IP66**

- 40°C to + 55°C

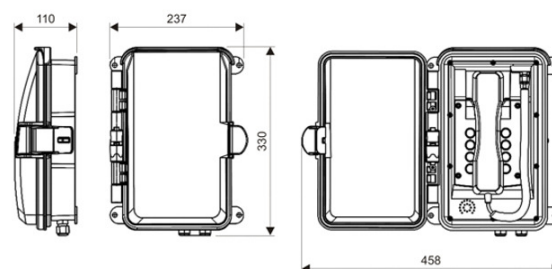

dimensions (W x H x D) 237,0 x 330,0 x 110,0 mm  
weight 2,3 kg

