


Indoor, weatherproof and explosion-proof phones (analog & VoIP)
P/N 7132127

Weatherproof analog ACB telephone for indoor and outdoor use with protection door.

- IP66 protection with closed door (according to IEC60529)
- Housing in polycarbonate
- Full 12-button keyboard
- PIN for changing settings
- Ringing volume:
 - approx. 90dB(A) at 1m distance with open housing cover
 - approx. 65dB(A) at 1m distance with closed housing cover
- Supply voltage: 24÷66VDC
- Supply current: 19÷100mA
- AC ringing voltage: 30÷90VAC
- Ringing signal frequency: 16÷68Hz
- Mouthpiece with elektret microphone
- Receiver with dynamic capsule
- Optical call indication
- Connection for secondary sounder
- Protective door in orange, red or transparent colour
- Cable glands: 2x M16 x 1,5 for 5-9mm cable diameters


HANDSET
WALL MOUNTING
IP66

- 40°C to + 55°C

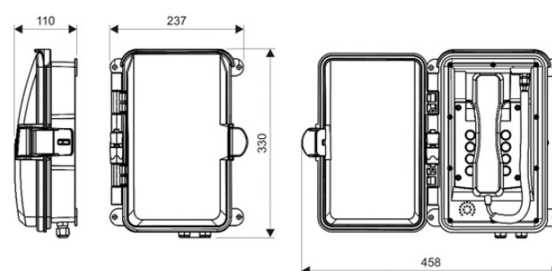

dimensions (W x H x D) 237,0 x 330,0 x 110,0 mm
weight 2,3 kg

