

Sound-powered phones for emergency communications

P/N 2964088

Weatherproof IP54 jack socket to be used in conjunction with the jack plug (P/N 2964156) in self-generating networks.

- Material: aluminium alloy
- Rated current: 6A
- Wall mounting
- Impact resistance: IK10 (IEC/EN 62262)
- Terminal blocks: screw for direct clamping
- Conductor section: 1,5mm² min. / 4mm² max.
- Colour: blue lid (RAL5015), grey base (RAL7035)

APPROVALS:

- CE
- 2001/95/CE (GPSD), 2011/65/UE (RoHS), 2012/19/UE (RAEE)

REFERENCE NORMS:

- EN 61984:2009, EN IEC 63000:2018


Accessory for all Sound-Powered and Portable Telephones



WALL MOUNTING

IP54

- 25°C to + 70°C

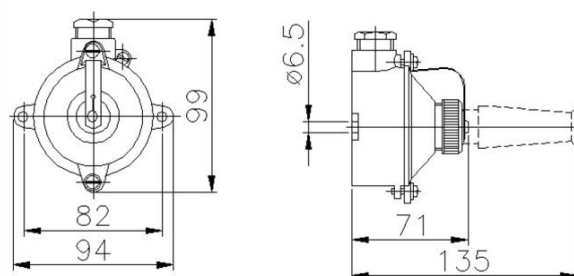

dimensions (W x H x D) 94,0 x 99,0 x 71,0 mm
weight 186 g

