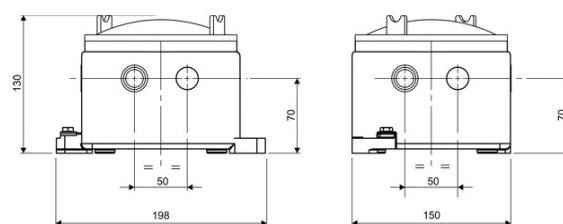


Telephone call repeater relays • indoor or weather & explosion proof
P/N 7333140

Multi-voltage electronic telephone ringer's relay

- Suitable for loads at 115÷230VAC (max. 5A) or 24÷48VDC (max. 1A)
- Explosion-proof ATEX case
- 2 output contacts: one repeats the ringing signal cadence, the other one bridges the call breaks
- IP66 protection (without cable gland)


WALL MOUNTING
IP66
ATEX


dimensions (W x H x D) 198,0 x 150,0 x 130,0 mm
weight 3,0 kg

