

Sound-powered phones for emergency communications
P/N 2964156

Weatherproof IP54 jack plug to be used in conjunction with the jack socket (P/N 2964088) in self-generating networks.

- Material: recyclable technopolymer
- Rated current: 6A
- Supply voltage: 25V÷50VDC
- Impact resistance: IK10 (IEC/EN 62262)
- Terminal blocks: screw-on, direct clamping
- Conductor section: 1mm² min. / 2,5mm² max.
- Colour: blue RAL5015 (lid), grey RAL7035 (base)

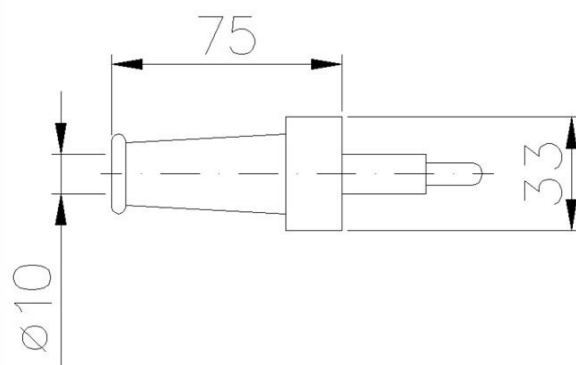
APPROVALS:

- CE
- 2001/95/CE (GPSD), 2011/65/UE (RoHS), 2012/19/UE (RAEE)

REFERENCE NORMS:

- EN 61984:2009, EN IEC 63000:2018

Accessory for all Sound-Powered and Portable Telephones


IP54
- 25°C to + 70°C

dimensions Ø 33,0 x 75,0 mm
weight 61 g
