

Handsfree full-duplex decontaminable phones (analog & VoIP)

P/N 7564468

Weatherproof flush mounting VoIP telephone for hospitals and cleanrooms.

HIGHLIGHTS

- IP66 front surface without holes and fully washable by common detergents or bactericidals
- Full-duplex handsfree conversation
- 8x programmable memory keys
- 1x status LED
- Automatic hang-up when the caller hangs-up
- Auto-answer feature after a programmable number of rings (00 to 99)
- RJ45 Ethernet interface with PoE and/or local power supply ($22 \div 57\text{VDC}$)
- Consumption: max. 4W
- Thin thickness (only 34mm deep, stainless steel back cover included)

VOIP FEATURES

- Communication protocol: standard SIP
- Line registrations: up to 10
- LAN/WAN connection: 1x 10/100 BaseT Ethernet LAN port - IP static address or DHCP
- Audio codecs: standard G.711 a-law/ μ -law; other codecs available on request
- Device configuration and management: internal Webserver GUI or via ASTRO System Manager
- Firmware update: via internal Webserver GUI, FTP, TFTP or ASTRO System Manager
- Real-time diagnostics: via SNMP v2c or ASTRO System Manager

* Product usually available ex stock. *



HANDSFREE


FLUSH MOUNTING

IP66

- 40°C to + 70°C

Option:

Remote Monitoring by ASTRO System Manager

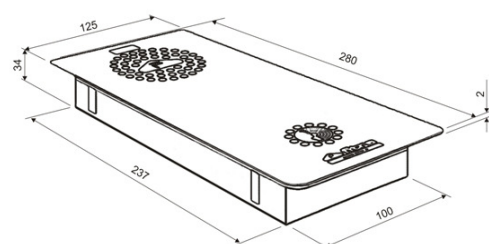

dimensions (W x H x D) 125,0 x 280,0 x 34,0 mm
weight 900 g

