

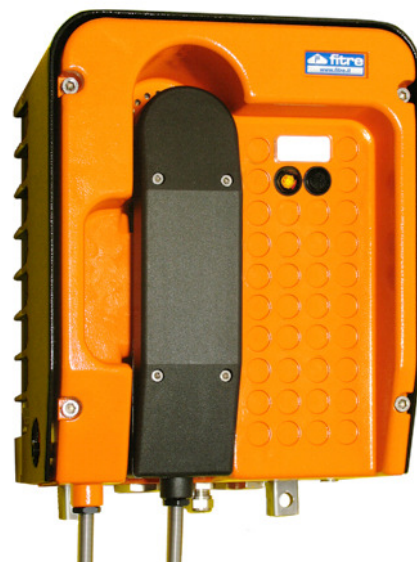
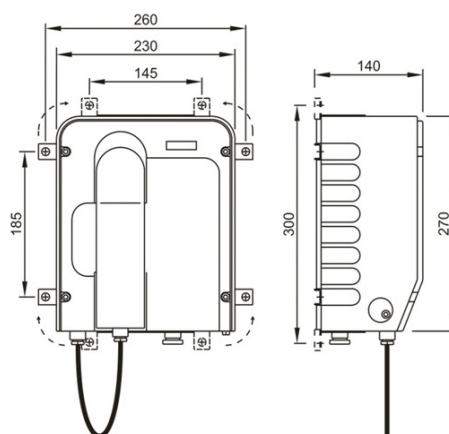
CB (Central Battery) and LB (Local Battery) phones
P/N 7131200

Analog LB weatherproof and vandalproof telephone
(it requires 3 pcs. LR20 1.5V batteries - type D - 60 x Ø34 mm usually
suitable for at least one year of service).

- No keyboard
- Die-cast "copper free" aluminium alloy case (suitable for
petro-chemical environments)
- Equipped with electronic ringer current generator
- Adjustable ringtone volume (max. 95dB/1m)
- INOX armored handset cable

-- Note --

If necessary, an additional external ringer such as the TRILLO 201T/E
(P/N 7322255) can be connected to the telephone.


HANDSET
WALL MOUNTING
IP66
- 20°C to + 70°C


dimensions (W x H x D) 230,0 x 270,0 x 140,0 mm
weight 5,9 kg

