



FITRE S.p.A. • Divisione DSI

20142 Milano • Italia • via Valsolda, 15
telefono: (+39) 02.8959.01 • telefax: (+39) 02.8959.0400
e-mail: divisione.dsi@fitre.it

F/EVA200 L-180

**Segnalatore luminoso <LED>
antideflagrante**

Explosion-proof <LED>

AC8481/1003

CARATTERISTICHE:

EEEx d IIC II2GD T6

Segnalatore luminoso con lampade LED ad elevato rendimento,
bassi consumi e durata illimitata,
guarnizione O-RING in neoprene per protezione meccanica IP65.

FEATURES:

EEExd IIC II2GD T6


Lighting fixtures LED with long-life, low consumption and high
performance, neoprene O-RING
gasket for waterproof protection IP65.

MATERIALI STANDARD:

Corpo e coperchio in lega leggera, viteria in acciaio inox, globo
trasparente in vetro termoresistente e resistente
agli urti, gabbia in acciaio inox (se richiesta).

STANDARD MATERIALS:

Aluminium body and cover, stainless steel hardware, transparent
globe resistant and impact resistant
glass, stainless steel guard (on request).

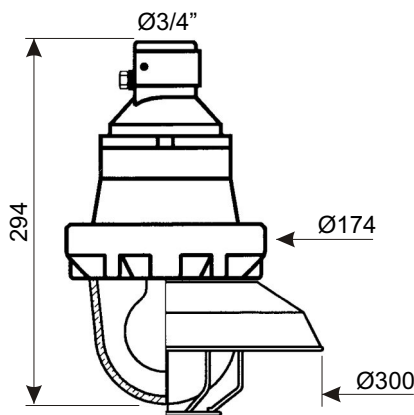

riflettore / reflector

LAMPADA LED tipo L-180 per F/EVA200 / LED LIGHT type L-180 for F/EVA200
Specifica tecnica / Technical specification

Tensione / Voltage	18 - 72 Vac/Vdc	(a richiesta/on request: 95 - 265 Vac/Vdc)
Corrente / Rated current	230Vac/Vdc 50mA	110Vac/Vdc 85mA 24Vac/Vdc 700mA
Temperatura / Working temperature		- 20 + 60° C
Frequenza / Frequency		40 ÷ 60Hz
Assorbimento medio / Power middle		15W
Luce / Light	Fissa-Intermittente-Rotante / Fixed light-Intermittent light-Rotating light	
Potenza lampada / Lamp power	2J (10Cd) (100 W)	
Servizio / Service	Continuo / Continuous	
Colore / Color	bianco / white (altri colori a richiesta/other colours on request)	



LAMPADA LED TIPO L-180
LED LIGHT TYPE L-180